

Net Viewer Functions



First thing you need to do **once** you have logged in is **RIGHT CLICK** on any channel and then press **OPEN ALL**, this will start the video stream for each of your cameras.



Preview tab will let you view your cameras.



Playback tab will display the Playback screen.



Download tab will let you Backup footage to your computer.



Device Log tab will give you a detailed log of DVR operations.



Config tab will take you to the settings menu.

Playback (Netviewer)



This activity timeline will display where footage has been recorded. Depending on the type of record mode (Manual, Schedule, Motion, Alarm) certain colours will indicate the exact time a recording has occurred.

By default it will always display the **current** days footage. If you wish to view another date you will find a **calendar** (see image below) on the right and side of the screen.



Once you have clicked which date you wish to search you next need to press the Inquiry button.



When you want to play a piece of footage simply double click the coloured part of the timeline you wish to view.




The Local Play button will let you play footage already saved on your PC.

Download/Backup (Netviewer)



This menu will allow you to backup footage straight to your computer.

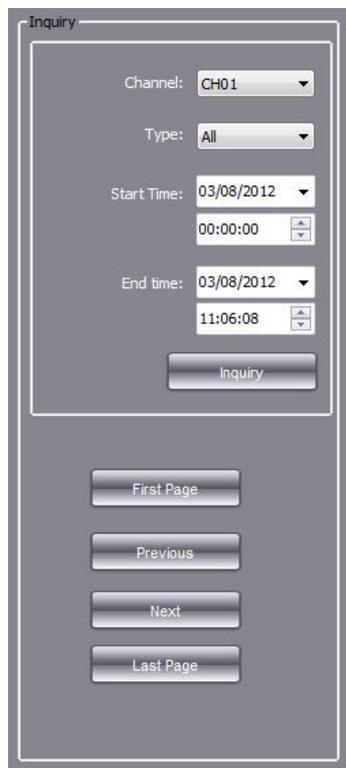


When searching for footage you will use the inquiry box. In here you will define which **channel** you wish to search and the **start time/date** and **end time/date**.

Once all the information has been entered you will need to press **Inquiry**. This button will return a list of video events that have occurred between the two points you previously defined.

Once the list has been populated you will be able to select which files you wish to backup by ticking the tick boxes on the left.

If satisfied with your selections next you will need to select where on your PC you wish to save these files. You can select a destination by using



the button.

The final step once the destination have been selected is to press the button. Your files will now begin to download.



files and save

Device Log

Serial	Operating User	Time	Ip Address	Channel	Description
1		2012-08-06 00:00:00	Local		Operate:Set the system time
2		2012-08-06 00:13:03	Local	14	Alarm:Motion detection start
3		2012-08-06 00:13:03	Local		Alarm:Alarm output
4		2012-08-06 00:13:03	Local		Alarm:Alarm output
5		2012-08-06 00:13:03	Local		Alarm:Alarm output
6		2012-08-06 00:13:03	Local		Alarm:Alarm output
7		2012-08-06 00:13:23	Local		Operate:
8		2012-08-06 00:13:34	Local	14	Alarm:Motion detection Stop
9		2012-08-06 01:18:22	Local	16	Alarm:Motion detection start
10		2012-08-06 01:18:22	Local		Alarm:Alarm output
11		2012-08-06 01:18:22	Local		Alarm:Alarm output
12		2012-08-06 01:18:22	Local		Alarm:Alarm output
13		2012-08-06 01:18:22	Local		Alarm:Alarm output
14		2012-08-06 01:18:42	Local		Operate:
15		2012-08-06 01:18:53	Local	16	Alarm:Motion detection Stop
16		2012-08-06 01:25:35	Local	15	Alarm:Motion detection start
17		2012-08-06 01:25:35	Local		Alarm:Alarm output
18		2012-08-06 01:25:35	Local		Alarm:Alarm output
19		2012-08-06 01:25:35	Local		Alarm:Alarm output
20		2012-08-06 01:25:35	Local		Alarm:Alarm output
21		2012-08-06 01:25:55	Local		Operate:
22		2012-08-06 01:26:05	Local	15	Alarm:Motion detection Stop
23		2012-08-06 02:21:29	Local	15	Alarm:Motion detection start
24		2012-08-06 02:21:29	Local		Alarm:Alarm output

Records: 3267 1/109

Log Path:

Inquiry

Start Time: 06/08/2012

End time: 06/08/2012


The device log will provide you with information regarding the DVRs operations.

You are able to define the start date and end date which will allow you to narrow the number of log pages returned. You can do this by using the **Inquiry** box.

If you wish to save the log information you can do so by using the **Log Path** option. To save you will need to select a folder you wish to save it to using the **browse** button. Once chosen click **Save Log**.

Log Path:

Config

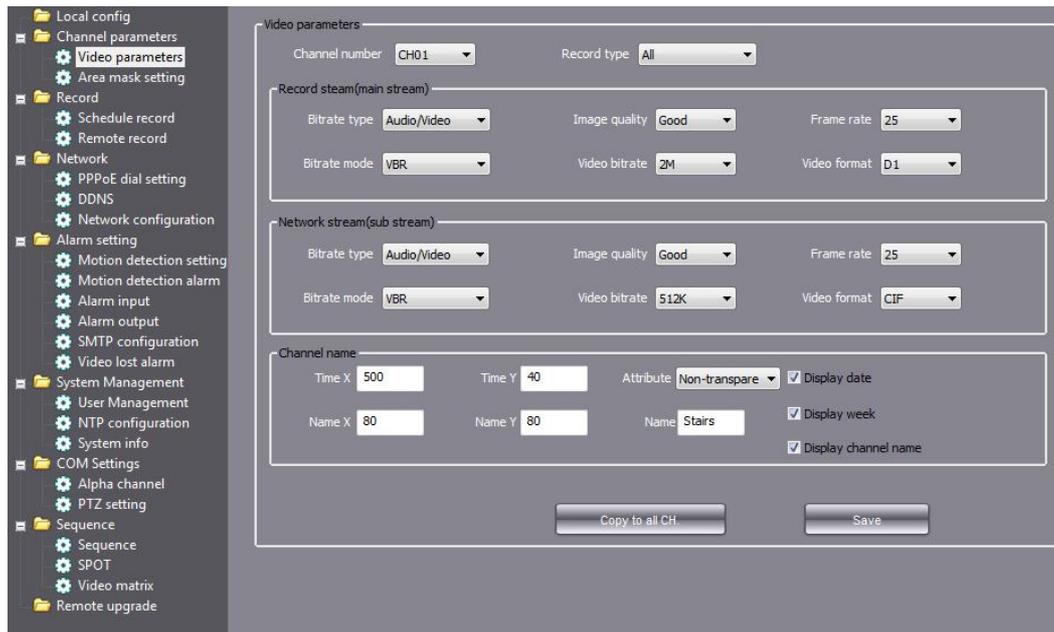

The **Config** section will let you configure every setting of the DVR.

Please refer to the main manual for a description of each setting and what it changes.

PTZ Control



Whilst on the **Preview Tab** you will have access to the PTZ control panel. From here you will be able to pan, tilt and zoom your PTZ camera as well as access the presets.

****Note : Your camera must have PTZ capabilities in order to use this****


Para



Whilst on the **Preview Tab** you can access the **Para** tab which will allow you to **individually** alter the brightness, contrast, saturation and hue of each channel.

This can be used to improve the picture which may also improve motion detection.

If you wish to return the settings to their original state press the **default** button.

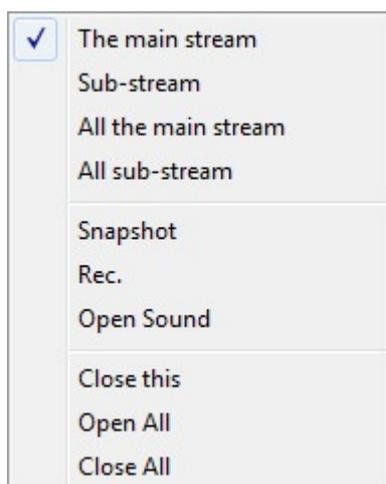

Channel Options

Whilst on the **Preview Tab** you are able to bring up channel options by **right clicking** will allow you too.

- Switch between the main stream and the sub stream
- Take a snapshot.
- Force manual record
- Open audio channels (requires a mic)
- Close individual channels.