



STAND-ALONE DIGITAL VIDEO RECORDER K-DVR-16NM

www.digitaldirectsecurity.co.uk
Sales hotline: 01480 459809

JPEG 2000 Network Transmission H.264



More Efficient and Stable compression
Triplex (Record, Playback and Remote Access simultaneously)
Excellent picture Quality in playback
Real-time Display
Advanced remote monitoring
VGA Monitor (Optional)
Audio (Optional)


Advanced remote monitoring (Best of Both)
View over internet Explorer (ActiveX)
PC Application Software (supplied)
Remote Viewing, Search & playback
Dynamic DNS Access
Remote Backup
Password Protection



8/16 Channel Video
4 Channel Audio Input / Output
Alarm Input / Outputs
TV Monitor, TFT LCD with VGA
IR Remote Control
Remote Control Keyboard (optional)
PTZ Camera Control

Specification

MODEL NUMBER	K-DVR-16NM
VIDEO COMPRESSION	JPEG-2000 Algorithm, H.264 for network Transmission
STORAGE CAPACITY	2 HDDs, with upto 1500G HDD per Drive
VGA	1CH (Supporting TFT LCD Monitor/ Option)
VIDEO INPUT	16CH
VIDEO OUTPUT	Monitor / VCR
SPLIT SCREEN	1,4,6,8,16 split
Compression	Basic, Normal, Enhanced, Fine & Super fine 12/KB (720x288/PAL)
RECORDING SPEED	NTSC 120fps(720x240), 240fps(360x240) PAL 100fps(720x288), 200fps(360x288)
RECORDING RESOLUTION	Full (720x240 / 720x288), Dual(360x240/ 360x288)
DISPLAY(FRAME/SEC)	Real time for all channel
DUPLEX/TRIPLEX	Triplex (Recording / Ethernet / Playback)
ZOOM	Available
PIP	Available
MOTION DETECT	Area division : 16x12
RECORDING MODE	Time, Motion, Schedule, Alarm
SEARCH MODE	Percentage Search, Date/ Time Search, Event Search
PASSWORD PROTECTION	Admin, Manager, User1~8 Allowed to access the system
ALARM INPUT	16 Alarm (NO/NC)
RELAY OUTPUT	1 (NO/NC)
BACKUP	DVD-RW back-up, Download via IP Network,
IR REMOTE CONTROLLER	Built-in
NETWORK	Ethernet(TCP/IP), PC Remote viewer (print snapshots) Advance Networking Options, H.264 for network Transmission Central Management Software, transmission rate control
FIRMWARE UPGRADE	USB port for firmware upgrade
OPERATION TEMPERATURE	5 ~ 40 degree Centigrade
OPERATING HUMIDITY	Less than 90% non condensing
POWER SUPPLY	DC Adapter(12V DC 8.3A)

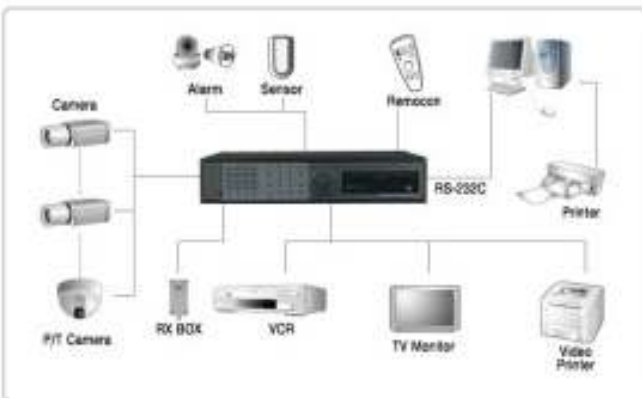

Digital Direct Security
Unit 7, Osprey Court,
Hinchinbrooke Business Park, Huntingdon, Cambs, PE29 6FN, UK.
Tel: +44 (0)1480 459809 Fax: +44 (0)1480 437172
Email: info@digitaldirectsecurity.co.uk Web: www. digitaldirectsecurity.co.uk