


Motion Detection Setup – Avenger NVR

Start by going into SETTINGS > CHANNEL > SCHEDULE RECORD.

In here you will need to;

- 1 - Tick "Enable Recording"
- 2 - Tick "All Day Recording"
- 3 - Select "Motion"
- 4 - Click "Copy To.." and select all channels.

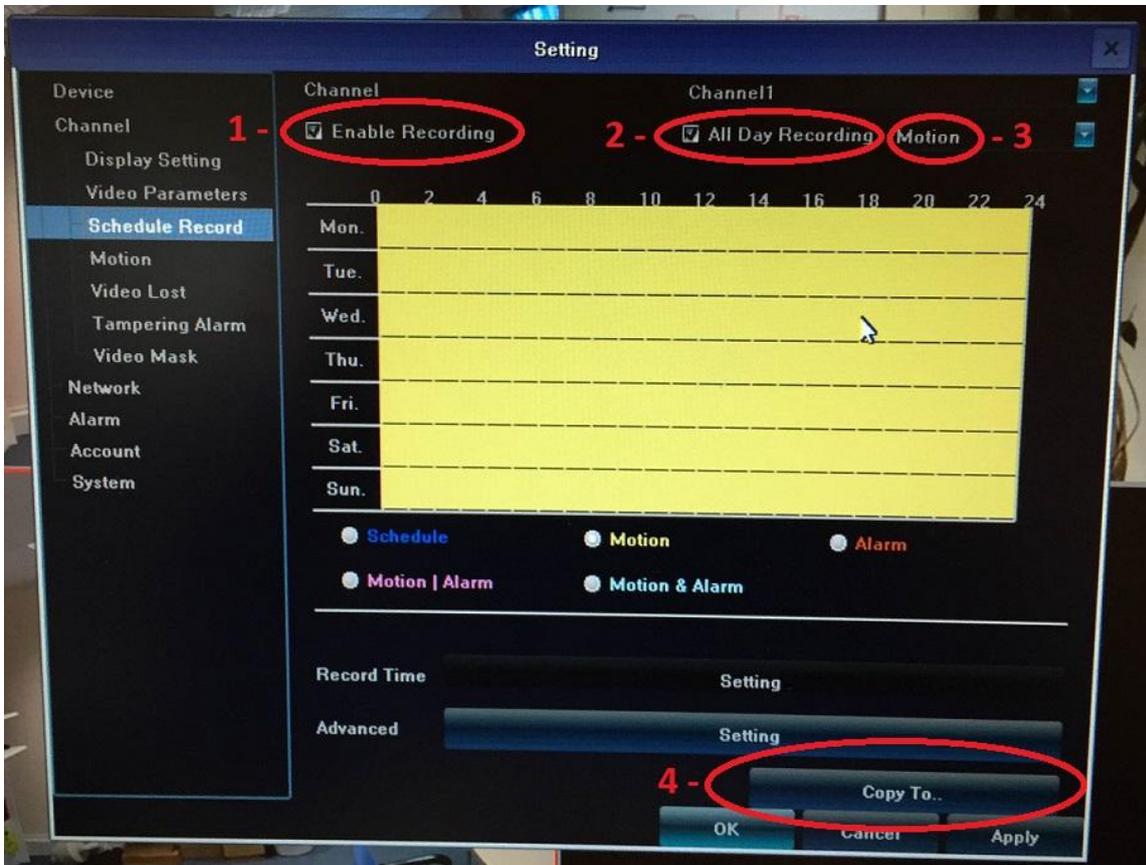


Once the above is complete click "Apply"


Next select "Motion" from the sub menu.

In here you will need to;

- 1 - Select which channel you wish to configure.
- 2 - Tick "Enable Motion Detection"
- 3 - Click "Setting" for "Area Setting", in here click and drag the red square so it covers the entire screen and press okay.

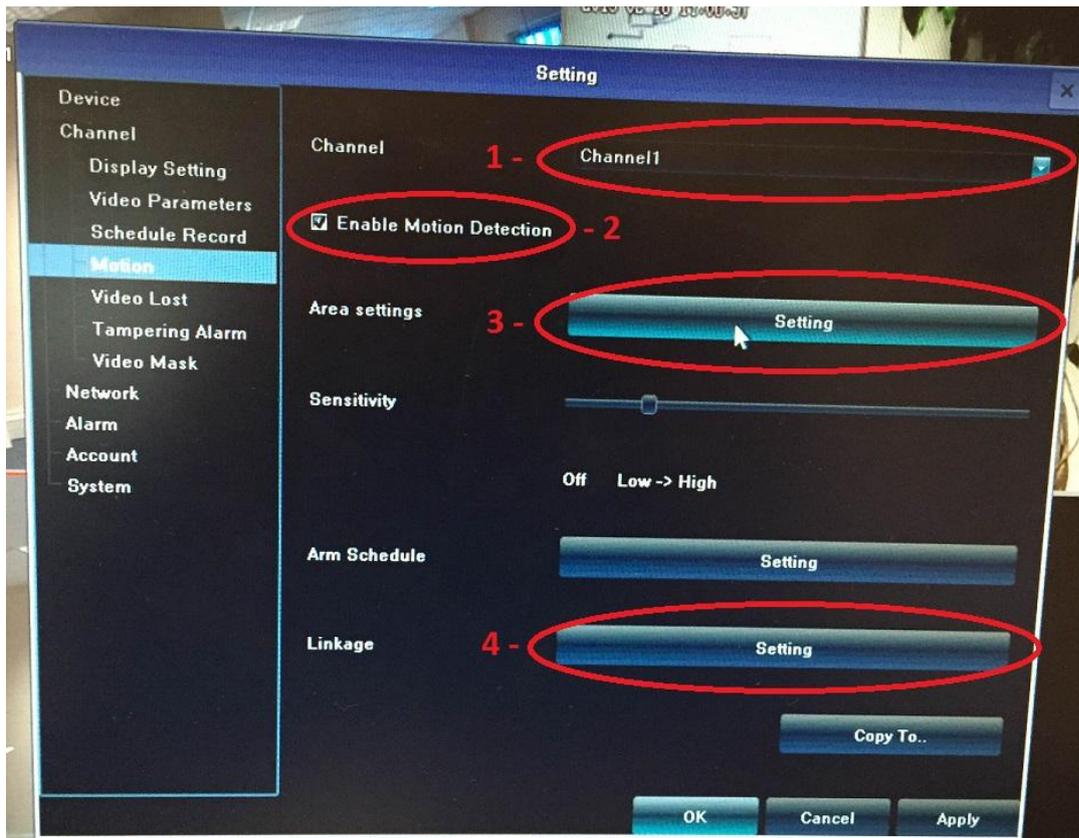

4 - Click "Settings" for Linkage, in here you will need to tick the linkage box which corresponds to the channel you are configuring. (for example; if you are configuring channel1 tick CH1 in linkage.)

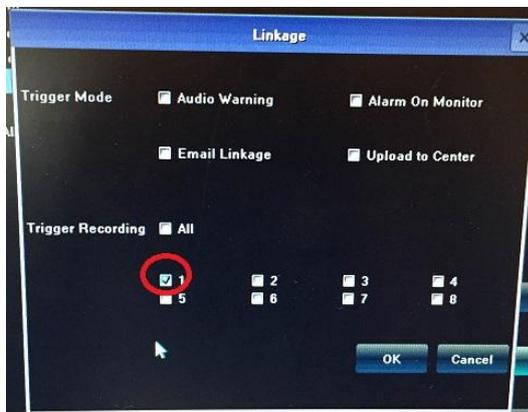

Once the above is complete press APPLY and motion detection is set!