


Motorised Pan/Zoom Camera (4MP)



Product Features

- 4 megapixel HD quality recording
- OmniVision chipset
- Image resolution: 2560 x 1440
- Mainstream 4MP @ 20fps, dual stream
- Advanced H.264/H.265 compression
- Motorised Auto Focusing 5-50mm lens
- 4 pcs IR LEDs, IR range 25-30m
- Presets points, Tours
- ICR, HLC, dWDR, DNR, BLC (auto)
- ONVIF compatible
- IP66 rating
- POE compatible (POE splitter required)
- Pan 0-160 degrees, Pan speed 30 degrees/sec

Dimensions

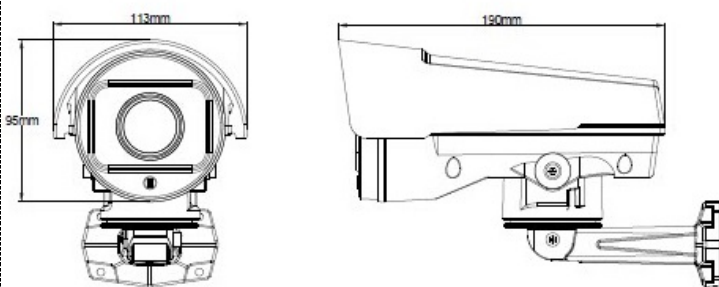

Accessories



POE-SPLIT

| Camera Specification | |
|-----------------------------|---|
| Model | HIP-589MZ |
| Camera | |
| Image Sensor: | OmniVision 4MP CMOS (1/3") |
| Resolution: | 4MP |
| Effective Pixels (H x V): | 2688 x 1520 |
| TV System: | PAL / NTSC |
| Shutter Speed: | 1/25s-1/50000 |
| Signal-to-noise Ratio: | ≥50dB |
| Iris: | Electronic |
| Back Light Compensation: | Auto |
| Wide Dynamic Range: | dWDR |
| Digital Noise Reduction: | 2D/3D |
| Gain Control: | Auto |
| Sync Mode: | External |
| White Balance: | Auto/Manual |
| Lens: | Motorised 5-50mm Lens |
| Field of View: | 55°~ 5° |
| Up-the-Coax Control: | N/A |
| Scanning: | Progressive Scan |
| Day/Night | |
| Day & Night: | IR Cut Filter (Smart IR) |
| Minimum Illumination: | 0.1 Lux |
| Infrared LEDs: | 35μ x 4pcs |
| IR Range: | 25-30m |
| IR Status: | Below 10 Lux by CDS |
| IR Control: | CDS Auto |
| Network | |
| Ethernet: | RJ45 10/100 |
| Supported Protocols: | TCP/IP,ICMP,HTTP,FTP, DHCP,DNS,DDNS,RTP, RTSP,RTCP,NTP,SMTP |
| ONVIF: | Supports ONVIF 2.4 |
| POE: | Splitter required |
| Main Stream: | 2560x1440@20fps |
| Sub Stream: | 720x480@30fps |
| General | |
| Power: | 12V DC (+/- 10%), 3A |
| Housing: | Metal |
| Operating Temperature: | -20°C +60°C |
| Operating Humidity: | 0% - 90% RH |
| Ingress Protection: | IP66 |
| Approvals: | CE / FCC |