


# Vortec Mini IP Dome Camera (Pro)



## Product Features

- Sony 4MP chipset
- Image Resolution 2560 x 1440 pixels
- Advanced H.264 compression, dual stream
- 1pcs IR LEDs, IR range 8-10m
- 2.8mm fixed-focal lens, 4MP glass
- Auto ICR
- dWDR, DNR, BLC (auto)
- ONVIF compatible
- Built-in POE
- IP65 rating

## Dimensions

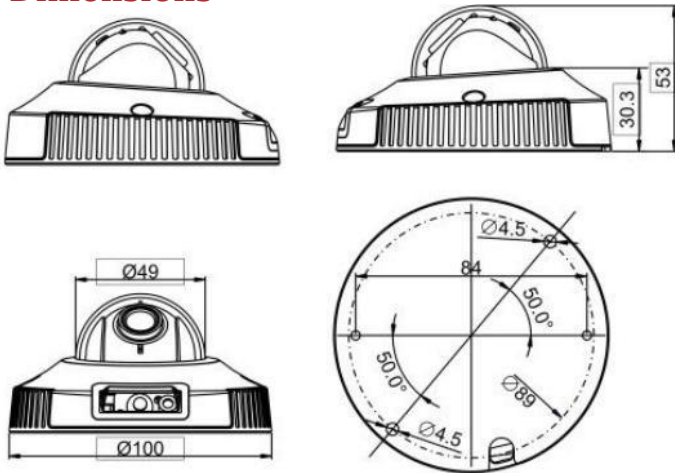

| <b>Camera Specification</b> |   |
|-----------------------------|---|
| <b>Model</b>                | <b>SIP4-349R</b>  |
| <b>Camera</b>               |   |
| Image Sensor:               | Sony CMOS (1/3")  |
| Resolution:                 | 4MP   |
| Effective Pixels (H x V):   | 2688 x 1520   |
| TV System:                  | PAL / NTSC  |
| Shutter Speed:              | 1/5-1/20000   |
| Signal-to-noise Ratio:      | ≥50dB   |
| Iris:                       | Electronic  |
| Back Light Compensation:    | Auto  |
| Wide Dynamic Range:         | dWDR  |
| Digital Noise Reduction:    | 2D/3D   |
| Gain Control:               | Auto  |
| Sync Mode:                  | Internal  |
| White Balance:              | Auto/Manual   |
| Lens:                       | Fixed 2.8mm Lens  |
| Field of View:              | 75°   |
| Scanning:                   | Progressive Scan  |
| Onboard Recording:          | Yes, to MicroSD card  |
| <b>Day/Night</b>            |   |
| Day & Night:                | IR Cut Filter (Smart IR)                                    |
| Minimum Illumination:       | Colour 0.05Lux, IR on 0Lux                                  |
| Infrared LEDs:              | 16μ x 1pc   |
| IR Range:                   | 8-10m   |
| IR Status:                  | Below 10 Lux by CDS   |
| IR Control:                 | CDS Auto  |
| <b>Network</b>              |   |
| Ethernet:                   | RJ45 10/100   |
| Supported Protocols:        | TCP/IP,ICMP,HTTP,FTP, DHCP,DNS,DDNS,RTP, RTSP,RTCP,NTP,SMTP |
| ONVIF:                      | Supports ONVIF 2.4  |
| POE:                        | Yes   |
| Main Stream:                | 2560x1440@15fps   |
| Sub Stream:                 | 720x480@30fps   |
| <b>General</b>              |   |
| Power:                      | 12V DC (+/- 10%), 650mA                                     |
| Housing:                    | Metal   |
| Operating Temperature:      | -20°C ~ +60°C   |
| Operating Humidity:         | 0% - 90% RH   |
| Ingress Protection:         | IP65  |
| Approvals:                  | CE / FCC  |